



Name	125 Non-thermal Break Aluminium Sliding Window
Thickness	1.6mm
Glass	5+14A+5mm tempered glass
Frame Depth	125mm
Application	Residential,Commercial

Features

- Sash embedded into the frame, better soundproof and waterproof
- Haida EPDM strip, better air-tightness
- Stepped tracks, better waterproof and drain function



Name	3518 Slim Frame Sliding Door
Thickness	2.0mm
Glass	8mm single glass/super white frost Optional: 4+9A+4mm/5+15A+5mm tempered glass/clear
Frame Depth	2Tracks/91mm, 3Tracks/137mm
Application	Residential,Commercial

Features

- Narrow frame, triple linkage, simple and beautiful
- Can be equipped with 60mm door cover line
- Can be made into monorail, hanging
- Anti-collision rubber blocks to increase the service life
- Siliconized weather strips are waterproof and dust proof



Name	65 Thermal Break Aluminium Hinge Door
Thickness	1.4mm
Glass	5+20A+5mm tempered glass
Frame Depth	65mm
Application	Residential,Commercial

Features

- Stepped track design, better waterproof and drain function
- 5+20A+5mm tempered glass, more light in, less heat through
- SS304 tracks, silent sliding



Name	78# Bi-folding Door
Thickness	1.6mm
Glass	5+20A+5mm tempered glass
Frame depth	75mm
Application	Residential,Commercial

Features

- Diversified folding and opening ways
- Good water proof ,moisture proof and sound proof
- Imported Kerssenberg hardware
- Anti-pinch rubber strips to protect the safety of the elderly and children
- Ball bearing and SS304 tracks, silent sliding



Name	40 Sliding Door
Thickness	2.3mm
Glass	5+15A+5mm tempered glass
Frame depth	2Tracks 106/3Tracks 160mm
Application	Residential,Commercial

Features

- SS304 tracks,silent sliding
- Integrated bending process,stable and more beautiful
- Optional wind-proof tracks,more safety and reliability



Name	RF40 Hinge Door
Thickness	1.6mm
Glass	5+20A+5mm tempered glass
Frame Depth	48mm
Application	Bathroom, Study room

Features

- SS304 hinges, waterproof, anti-corrosion and anti-oxidation,about 100,000 opening times
- Zinc alloy ergonomic handle, waterproof and non-fading
- Blind can be installed between the glass



Name	T6 Thermal Break Tilt & Turn Window
Thickness	2.0mm
Glass	5+27A+5mm/5+12A+5+12A+5mm tempered glass
Frame Depth	86mm
Application	Residential,Commercial

Features

- 5+27A+5mm, excellent soundproof, energy efficient
- Three layers sealing, the frame and sash are flush, refined appearance
- The pin gluing process enhances the overall sealing performance
- Imported Hardwares, more durable



CREATE A DIFFERENT SENSE  
OF QUALITY WHOLEHEARTEDLY





COMPANY PROFILE

Xing Ji Aluminum Group is a leading manufacturer in Guangdong province, China, specializing in aluminum doors, windows, profiles, and curtain walls. As one of China's Top 10 Aluminum Window & Door system Manufacturers, we take pride in our 150,000 square meter factory, which includes three production factories and over 800 skilled workers.

Since 1999, we have been committed to providing high-performance, reliable, durable, and aesthetically pleasing products at an affordable price. We believe in a design-centered approach that pushes the boundaries of what is possible while maintaining affordability.


At Xingji, we value our customers and strive to provide the most extensive pre and after-sales service to

help them select the best products for their climate, application, and budget. Our vision is to make every season satisfying with energy-saving windows and doors that enhance your living experience.

To meet our customers' needs, we continuously research and develop products with features such as air tightness, water tightness, heat resistance, sound resistance, big view, slim frame, and hurricane proof. We adhere to the principles of "quality first, customer first, and credit-based" since our establishment.

We welcome you to cooperate with us and experience our excellent services, high-quality products, and affordable prices.

OUR COOPERATORS

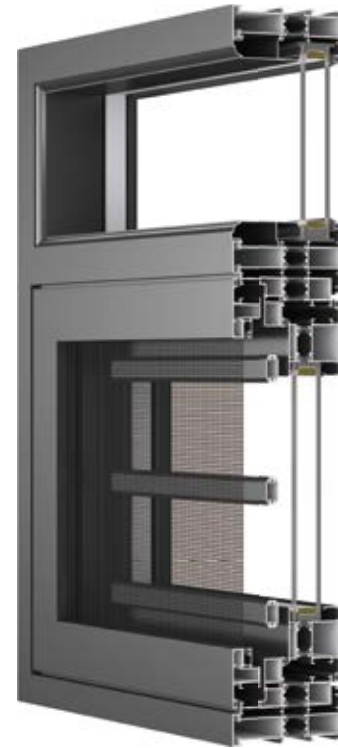


Name	Milan_B Thermal Break Casement Window
Thickness	2.0mm
Glass	5+20A+5mm tempered glass
Frame Depth	112mm
Application	Residential,Commercial

- Features
- Double frame layers design,funnel drainage system
  - German hardware, bidirectional transmission box,originally installed curved glazing bead
  - The pin gluing process enhances the overall sealing performance



Name	Slim Frame 5-Tracks Sliding Window
Thickness	2.0mm
Glass	5+20A+5mm double tempered glass
Frame Depth	2Tracks/111mm, 3Tracks/139mm
Application	Residential,Commercial

- Features
- Big window, large view
  - 5+20A+5mm double tempered glass,more light in, less heat through
  - Door stile strengthen>window structure safer and more stable
  - The side lock looks easy and modern
  - The floor-drain drainage way, unobstructed drainage
  - The up track anti-off wheel device,better stability
  - Optional LED light strip,romantic home atmosphere

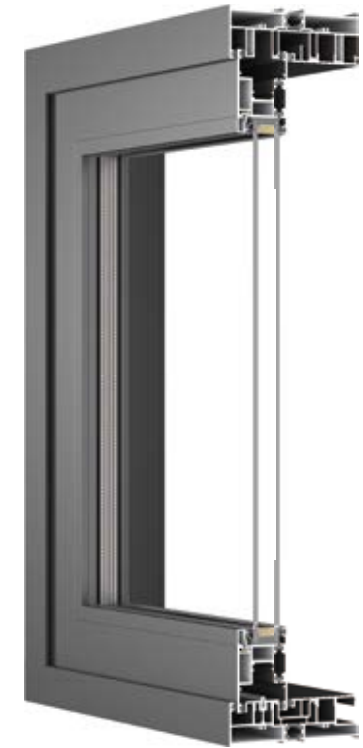

Name	138 Thermal Break Aluminium Sliding Door
Thickness	2.0mm
Glass	5+20A+5mm tempered glass
Frame Depth	2Tracks/138mm, 3Tracks/206mm
Application	Residential,Commercial

- Features
- Can be used as conventional or electric sliding door
  - Can be used as two-track or three-track
  - Design of inner water retaining edge plus water guide groove
  - Infrared sensor anti-collision, face recognition, IC card sensor, fingerprint lock
  - Floor-to-ceiling windows with glass railings

SUNROOMS



Gable Roof



Curved Roof



Flat Roof



Single-slope Roof



Foshan Curma Building Material Co. LTD

Address: Huiguo Road, Hongsha Hi-Tech Development Zone, Guanyao, Nanhai District, Foshan City  
Web:www.curmawins.com E-mail: jennali@aliyun.com

