



豪锐 42*33 系统推拉门

HAO RUI 42*33
SLIDING DOOR



新简约极窄平开门

EXTREMELY NARROW FRAME HINGE DOOR



新米兰中窄平开门

NEW MILAM MEDIUM NARROW HINGE DOOR


广东星际铝业有限公司工程部

ENGINEERING DEPARTMENT OF GUANGDONG XINGJI ALUMINUM INDUSTRY CO., LTD




90 非断桥推拉窗

NON THERMAL BREAK
ALUMINUM SLIDING WINDOW

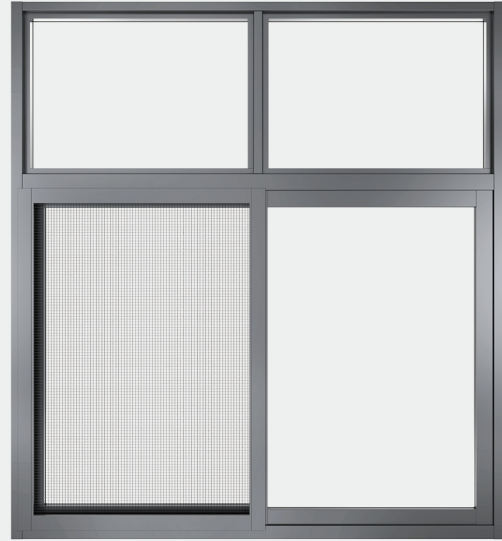

室外
OUTDOOR

室内
INDOOR

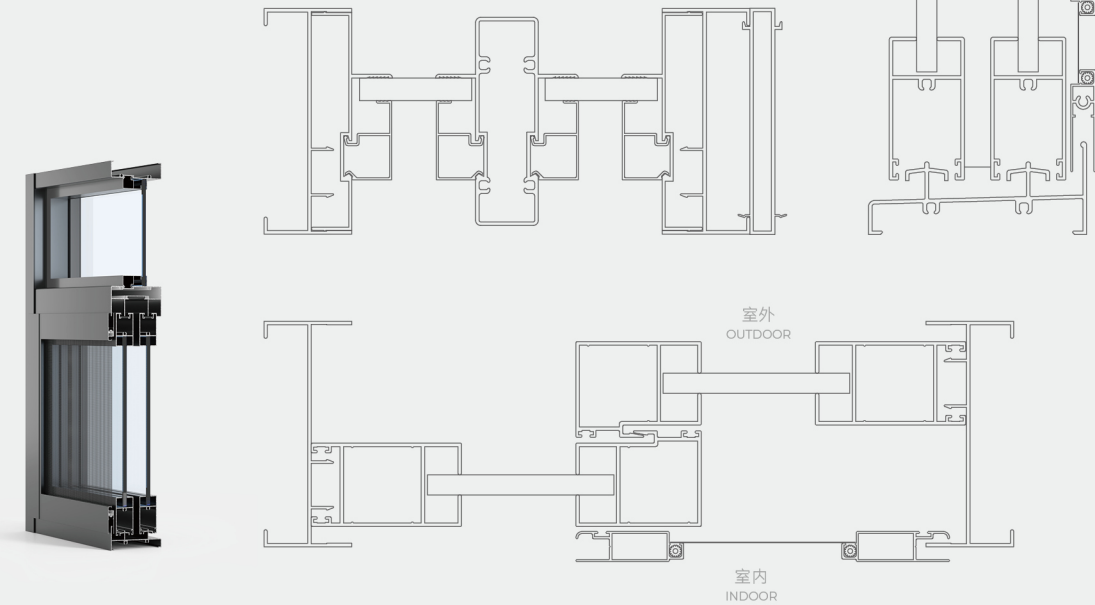

T1.4/T1.8 单玻 (钢化)

T1.4/T1.8 SINGLE GLASS
(TEMPERED)


产品配置 PRODUCTION CONFIGURATION

- ① 单玻厚 6mm
- ② 固玻可选择方、斜压线
- ③ 可做两轨两扇，两轨四扇（均可选配带挂纱扇）
- ④ 可选平轨下轨或防风高轨下轨
- ⑤ 可做上固玻下开启，下固玻上开启，上下固玻中间开启
- ⑥ 表面默认砂纹灰色

- ① 6mm single glass
- ② Glazing stop optional: square, sloping
- ③ Track optional: 2tracks+2panels, 2tracks+4panels(optional flyscreen available)
- ④ Track optional: flat track, high-low track
- ⑤ Style: fix glass up+sash down, sash up+fix glass down/fix glass at top and down+sash in the middle(配图)
- ⑥ Surface finishing Sand grain gray


90 非断桥推拉窗

NON THERMAL BREAK
ALUMINUM SLIDING WINDOW

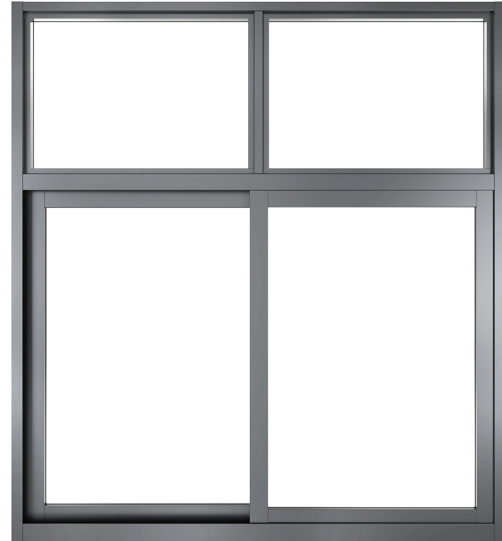

室外
OUTDOOR

室内
INDOOR

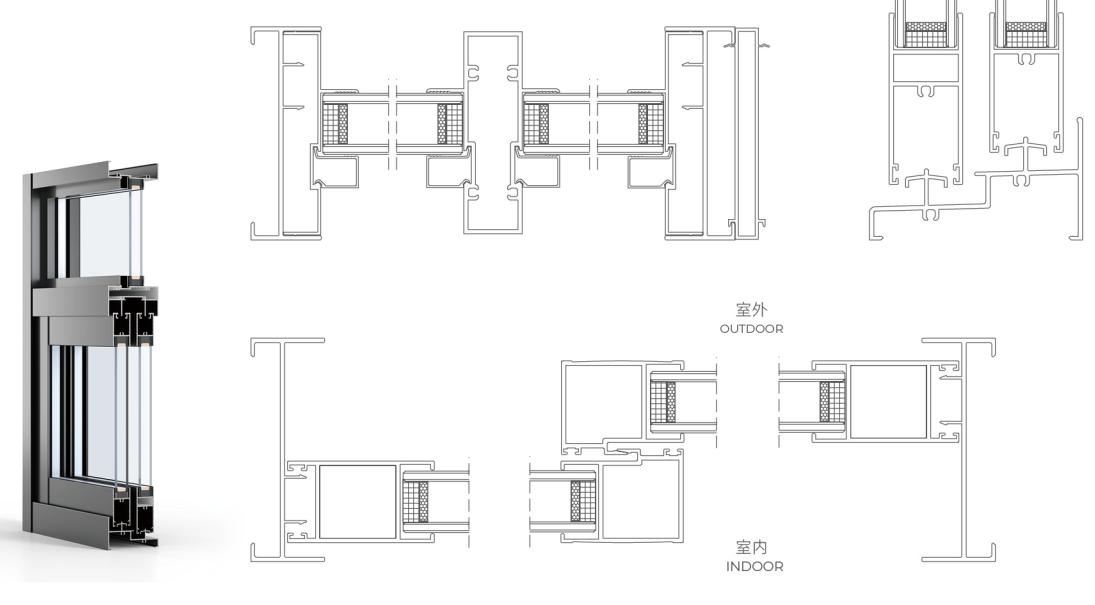

T1.4/T1.8 双玻 (钢化)

T1.4/T1.8 DOUBLE GLASS
(TEMPERED)

产品配置 PRODUCTION CONFIGURATION

- ① 双玻中空 5+15A+5
- ② 固玻可选择方、斜压线
- ③ 可做两轨两扇，两轨四扇（均可选配带挂纱扇）
- ④ 可选平轨下轨或防风高轨下轨
- ⑤ 可做上固玻下开启，下固玻上开启，上下固玻中间开启
- ⑥ 表面默认砂纹灰色

- ① Glass: 5+15A+5mm
- ② Glazing stop optional: square, sloping
- ③ Track optional: 2 tracks+2panels, 2tracks+4panels(optional flyscreen available)
- ④ Low track optional: flat, high-low
- ⑤ Style: fix glass up+sash down, sash up+fix glass down/fix glass at top and down+sash in the middle(配图)
- ⑥ Surface finishing Sand grain gray


DOORS & WINDOWS
**XINGJI
ALUMINUM**
●●





50 非断桥平开窗

NON THERMAL BREAK
ALUMINUM CASEMENT WINDOW


外开窗
OPEN
OUTWARD



外压线制作
SLOPING GLAZING STOP

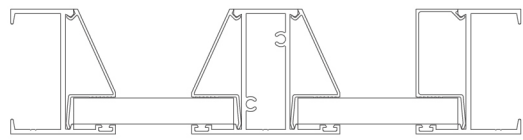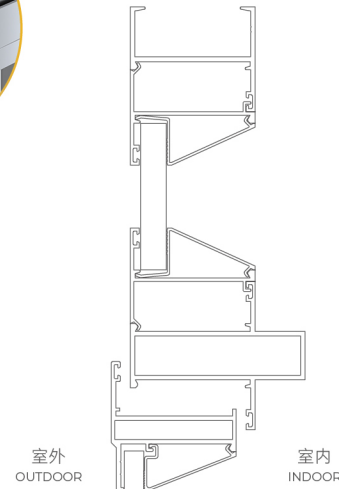

室外
OUTDOOR

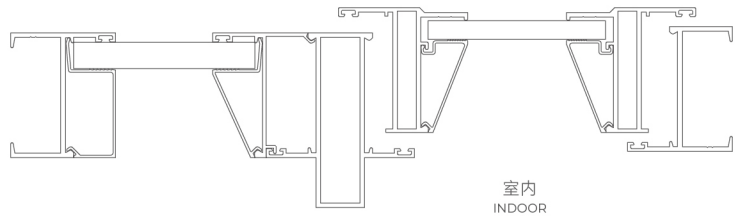

室内
INDOOR

T1.4/T1.8 单玻 / 双玻 (钢化)

T1.4/T1.8 SINGLE GLASS
/ DOUBLE GLASS (TEMPERED)

产品配置 PRODUCTION CONFIGURATION


- ① 边框连接默认为榫接，也可选择螺丝链接型材制作
- ② 单玻厚 6mm、双玻中空 6+12A+6
- ③ 可选配方、斜压线，可配加强中柱 (70 转 50)
- ④ 固玻默认外压线制作，可选配内压线制作
- ⑤ 表面默认砂纹灰色

- ① The frame connection way: mortise and tenon by default optional: screw connection
- ② Single glass:6mm Double glass:6+12A+6mm
- ③ Glazing stop optional: square,sloping.(installed outside by default, optional inside)
- Mullion:straightened(70 to 50)
- ④ Glazing Angled Bead install outside ,install inside as optional
- ⑤ Surface finishing:Sand grain gray




50 非断桥平开窗

NON THERMAL BREAK
ALUMINUM CASEMENT WINDOW


上悬窗
AWNING
WINDOW



70/50 转换图
STRENGTHEN
THE CENTER COLUMN

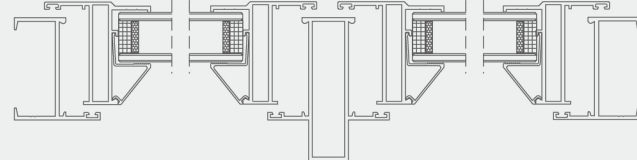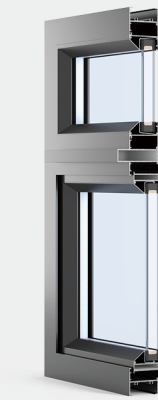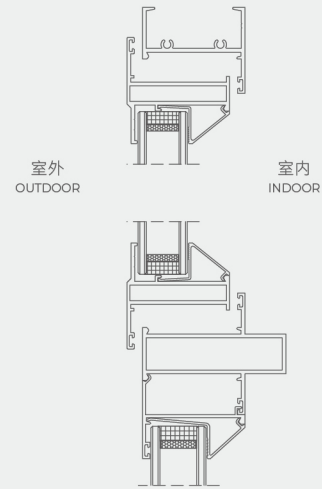

室外
OUTDOOR

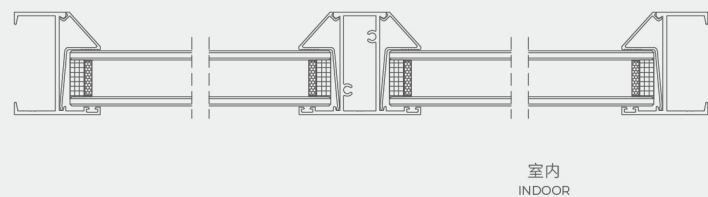

室内
INDOOR

T1.4/T1.8 单玻 / 双玻 (钢化)

T1.4/T1.8 SINGLE GLASS
/ DOUBLE GLASS (TEMPERED)

产品配置 PRODUCTION CONFIGURATION


- ① 边框连接默认为榫接，也可选择螺丝链接型材制作
- ② 单玻厚 6mm、双玻中空 6+12A+6
- ③ 可选配方、斜压线，可配加强中柱 (70 转 50)
- ④ 固玻默认外压线制作，可选配内压线制作
- ⑤ 上悬窗扇面积 ≥ 1 m² 时配置风撑固定，且开启角度 < 20°
- ⑥ 表面默认砂纹灰色

- ① The frame connection way: mortise and tenon by default optional: screw connection
- ② Single glass:6mm Double glass:6+12A+6mm
- ③ Glazing stop optional: square,sloping.(installed outside by default, optional inside)
- ④ Mullion:straightened(70 to 50)
- ⑤ Limit Position Friction Stay Wind Brace will be standard when awning sash area ≥ 1 m², and it's opening angle ≤ 20°
- ⑥ Surface finishing:Sand grain gray


50 非断桥平开窗

NON THERMAL BREAK
ALUMINUM CASEMENT WINDOW

双外开窗
FRENCH
WINDOW

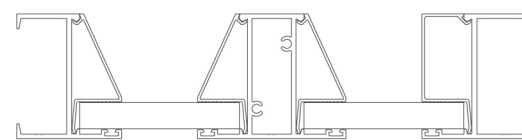

室外
OUTDOOR

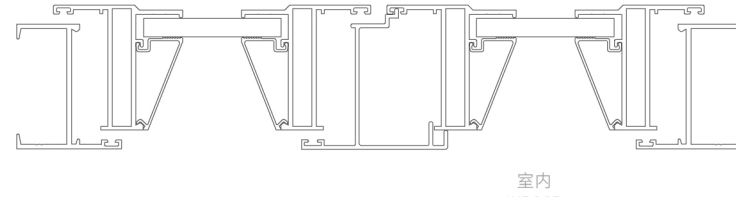

室内
INDOOR

T1.4/T1.8 单玻 / 双玻 (钢化)

T1.4/T1.8 SINGLE GLASS
/ DOUBLE GLASS (TEMPERED)



产品配置 PRODUCTION CONFIGURATION

- ① 边框连接默认为榫接，也可选择螺丝链接型材制作
- ② 单玻厚 6mm、双玻中空 6+12A+6
- ③ 可选配方、斜压线，可配加强中柱 (70 转 50)
- ④ 固玻默认外压线制作，可选配内压线制作
- ⑤ 双外开可选用真假中柱型材制作
- ⑥ 表面默认砂纹灰色


- ① The frame connection way: mortise and tenon by default optional: screw connection
- ② Single glass:6mm Double glass:6+12A+6mm
- ③ Glazing bead optional: square,sloping.(Glazing bead installed outside by default, optional inside)
- ④ Mullion:straightened(70 to 50)
- ⑤ Optional fake mullion,real mullion
- ⑥ Surface finishing:Sand grain gray

82 非断桥推拉窗


NON THERMAL BREAK
ALUMINUM SLIDING WINDOW

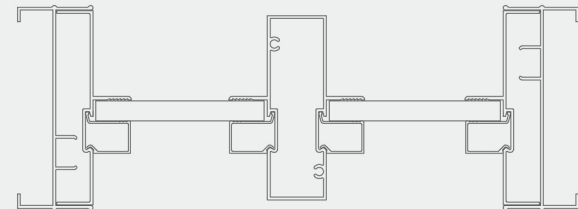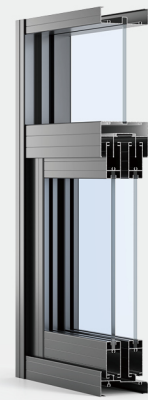

室外
OUTDOOR

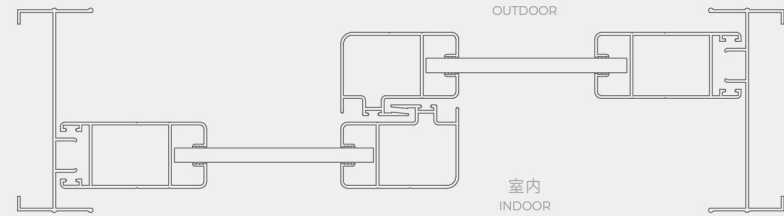

室内
INDOOR

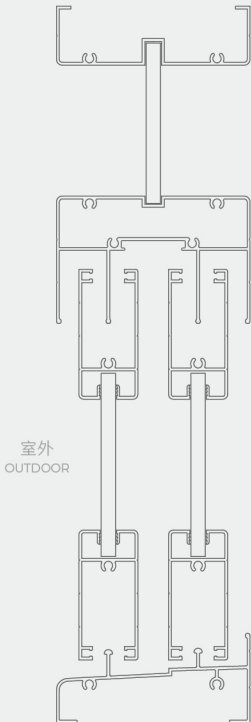

室外
OUTDOOR

室内
INDOOR

T1.2 单玻 (钢化)

T1.2 SINGLE GLASS
(TEMPERED)

产品配置 PRODUCTION CONFIGURATION

- ① 玻璃厚为 6mm 钢化
- ② 可做两轨两扇，两轨四扇
- ③ 固玻可选用方、斜压线
- ④ 可做上固玻下开启，下固玻上开启，上下固玻中间开启
- ⑤ 表面默认砂纹灰色

- ① 6mm tempered single glass
- ② Track optional: 2 tracks+2panels, 2tracks+4panels
- ③ Glazing stop optional: square,sloping
- ④ Style:fix glass up+sash down, sash up+fix glass down,fix glass at top and down+sash in the middle
- ⑤ Surface finishing:Sand grain gray